

IP KVM Extender

4K30 Dual Head HDMI IP KVM Extender over CATx With Local Out, Audio, RS-232, USB 2.0, 100m

Model: IPKX-A430-DH100

PRODUCT OVERVIEW

The **IPKX-A430-DH100, Dual Head HDMI IP KVM Extender**, allows users to locally connect HDMI monitors, USB keyboard, mice, and other devices, as well as speakers and microphones, to operate remote computers, servers, or other IT devices. Additionally, you can view the output video from the remote source device through the local loopback port of the Dual Head HDMI KVM Extender.



KEY FEATURES

- Supports HDMI input/output video quality up to 3840 x 2160 @ 30Hz and 1920 x 1200 @ 60Hz.
- Local HDMI loopback on the transmitter (TX) unit for monitoring.
- Supports dual monitors in synchronization on both PC and console ends.
- Video / USB / RS-232 / audio extension distance up to 100 meters (330 feet) using two CAT5e/6/6a Ethernet cables.
- Two RJ-45 Ports for extension over CATx.
- Transparent USB extension supporting USB 2.0/1.1 with 4 ports for compatibility with various devices such as storage drives, touch screens, printers, keyboards, mice, etc. Maximum USB signalling rate is 12Mbps.
- Supports 2-way analog audio extension.
- Supports bidirectional Serial RS-232 extension at a fixed baud rate of 115,200bps.
- LED indicators show status for respective power and link.
- Supports EDID Pass-through from remote display at the Receiver end.
- Compliant with HDMI 1.4.

IP KVM Extender


PRODUCT SPECIFICATIONS

IPKX-A430-DH100	Transmitter (TX)	Receiver (RX)
Video Input	HDMI 19-Pin Female x 2	-
Video Output	HDMI 19-Pin Female x 2	HDMI 19-Pin Female x 2
Max. Video Resolution	Up to 3840x2160@30Hz	
USB Extension	USB Type B Female x 1	USB Type A Female x 4
Audio Extension	Analog Audio 3.5mm Jack - Line IN x 1 - Line Out x 1	Analog Audio 3.5mm Jack - MIC IN x 1 - Speaker Out x 1
Serial Extension	D-SUB 9-Pin Female x 1 Fixed Baud Rate 115,200bps	D-SUB 9-Pin Male x 1 Fixed Baud Rate 115,200bps
LED Indicator	Power: Red LED Link: Green LED	
DDC Supported	DDC, DDC2, DDC2B	
Link Port	RJ-45 (1Gbps) x 2	
Extension Range	Max. 100m (330 ft) with CAT5e/6/6a cable	
OS Compatibility	OS Independent	
Power Supply	External DC 5V / 2A	
Dimension (L x W x H mm)	180 (7.09") x 83 (3.27") x 43 (1.69")	
Weight (g)	510	510
Housing Material	Chassis Metal	
Operating Environment	0 ~ 50°C (32 ~ 122°F)	
Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)	
Humidity	0% - 80% RH	
Supported Resolutions (including but not limited to)	<ul style="list-style-type: none"> - 3840x2160@30Hz - 2560x1440@60Hz - 2560x1440@30Hz - 1920x1200@60Hz - 1920x1080@60Hz - 1680x1050@30Hz - 1366x768@60Hz - 1360x768@60Hz 	<ul style="list-style-type: none"> - 1280x1024@60Hz - 1280x800@60Hz - 1280x768@60Hz - 1152x864@60Hz - 1024x768@60Hz - 1024x600@60Hz - 800x600@60Hz

IP KVM Extender

CONNECTION DIAGRAM

4K30 Dual Head HDMI IP KVM Extender (IPKX-A430-DH100)

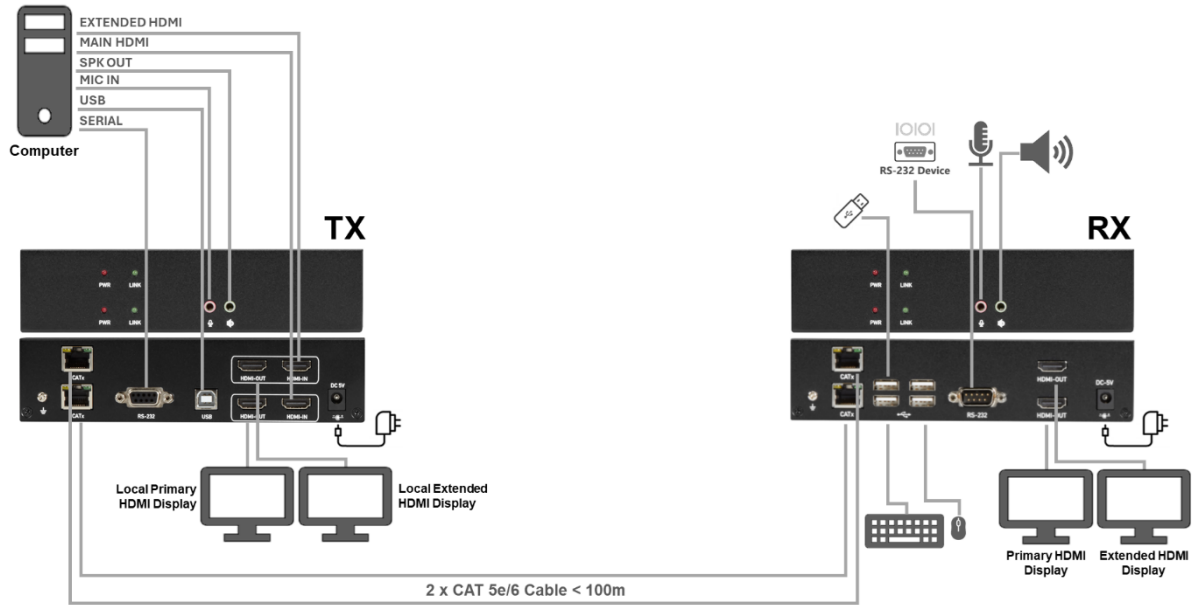

PANEL DIAGRAMS

Transmitter (TX) Front and Rear Panel:



Receiver (RX) Front and Rear Panel:



IP KVM Extender

PACKAGE CONTENTS

- 1 × IPKX-A430-DH100 Transmitter Unit
- 1 × IPKX-A430-DH100 Receiver Unit
- 2 × 5V/2A DC Power Adapter
- 2 × HDMI Cable
- 1 × 3.5mm MIC/SPK Combo Cable
- 1 × USB Type A-B Cable
- 1 × Quick Start Guide
- 1 × L-Plate Brackets Set

WARRANTY

- Standard 1-Year Limited Warranty, unless otherwise specified by Sales.
- Optional Advance Replacement Warranty is available upon request

ORDERING INFORMATION

Part Number	Descriptions
IPKX-A430-DH100	4K30 Dual Head HDMI IP KVM Extender over CATx with Local Out, Audio, RS-232, USB 2.0, 100m

CONTACT INFORMATION

For more information, please visit our website or contact our customer service team:

- **Website:** www.dsgio.com
- **Email:** sales.apac@dsgio.com

DISCLAIMER

DSGIO shall not be liable for any damages, including punitive, consequential, or cost of cover damages, arising from any errors in the product information or specifications provided in this document. This document is subject to revision by DSGIO at any time without prior notice.